

## PERFORMANCE


°F   %RH	80   60	75   50
Water Removal (P/Day)	746	530
Efficiency (P/kWh)	7.3	5.0
Energy Factor (L/kWh)	3.5	2.4

## ELECTRICAL


°F   %RH	80   60
Supply Voltage	480V
Current Draw	6.5A
MCA*	10A
MOP*	15A
Recommended Breaker Size	10A
Power	4,300W
Power Cord	Hardwire, no cord
CFM	1,750
BTU (Total)	48,400
BTU (Heat of Condensation)	33,900
BTU (Motor Load)	14,500

## SPECS

Control Type	External control required (not provided)
Refrigerant Type	R410a
Refrigerant Amount	6 lb 4 oz
Weight	340 lb
Air Filter MERV Rating	MERV-13
Dimensions	18" x 20" x 2"
Drain Port Connection	3/4" Threaded NPT
Operating Temperature	56 F Min-95 F Max

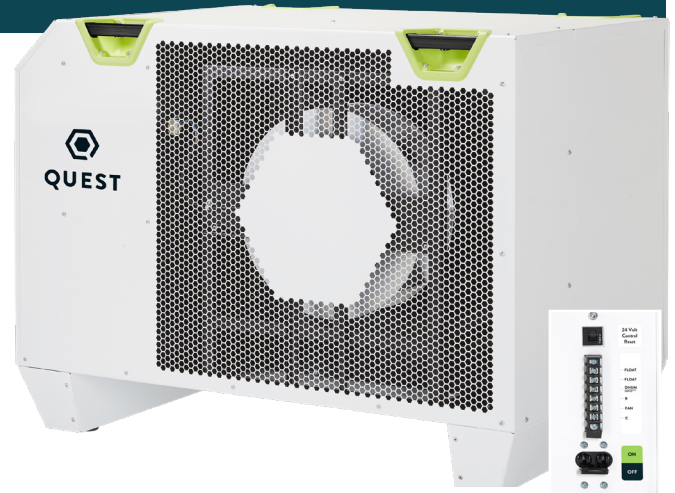

## DIMENSIONS

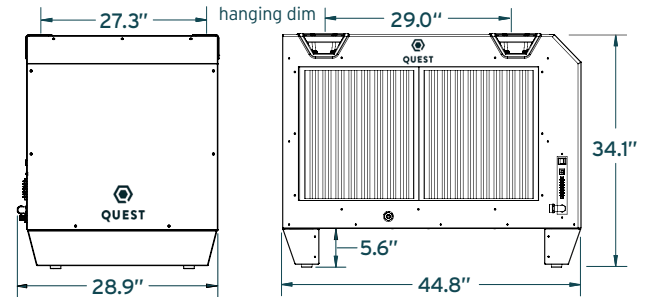

## FEATURES

- + **Patented M-CoRR Technology:** Achieves the highest efficiency in its class
- + **Superior MERV-13 Filtration:** Removes harmful contaminants from the air, such as mold, bacteria and some viruses
- + **Integrated Hang Points** and handles allows for easier movement and flexible installation
- + **Low Amp Draw**, putting less load on the grid and freeing up electricity for other equipment
- + **Auto-Restart** to previous settings after loss of power

Specifications are subject to change without notice. Drawings are not to scale. \*See manual for details on MCA/MOP.